


Remote Controller for Turn On, Turn Off and Reboot 3 Electrical Devices over GSM.

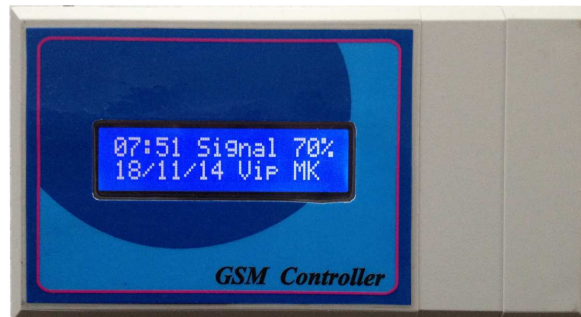

General Features

Dual-Band	900/1800 MHz
GPRS Mobile station	Class B
Compliant to GSM Phase	Class 4 (2W @ 900 MHz) Class 1 (1W @ 1800 MHz)
Low Power Consumption	1,1 mA
Operation Temperature	-40°C to +80°C
External SIM	
RTC Backup	

GSM-SMS Controller is highly professional and intelligent system with digital control. Thanks to that system you can:

- Remotely control of electrical devices, manufacturing process machines, communication equipments and etc.
- Management is done through GSM network with sending a SMS from the SIM card placed into the device.
- Outputs for switching active loads with power up to 2 kW via 3 low-voltage relays
- Switching the relays with SMS with specific text
- Remember the state of switches even the main power supply fails.
- Backup power supply when main supply fails.

Application of GSM-SMS Controller is very appropriate in:

- Heating systems
- Systems control
- Individual protection of houses, garages, cottages and other premises
- Access control. Gate/door control